

Serial RF Radio 50mW – Industrial  
Part no. EZ500



The EZ500 is a light-industrial grade serial RS232 RF radio modem with a high power output of 500mW allowing an extra long communication range of up to 9800 feet. It will allow you to send and receive wireless serial data between two serial devices or computers.


The advantage of a serial RF radio such as this is that it can be used without an operating system as a host. An operating system is only required to configure the parameters of the radio.

The parameters can be configured through the serial port of the radio by using the downloadable configuration utility. If your computer does not have an available COM port we strongly recommend using a high quality USB to serial adapter such as our part XS8801 for configuring the parameters.

This radio works in the unlicensed 915Mhz frequency band so no radio license is required.

It is ideal for most types of wireless serial communication of manufacturing machinery, CNC's, PLC's, printers, bar-code scanners or even home automation control.

Application example:

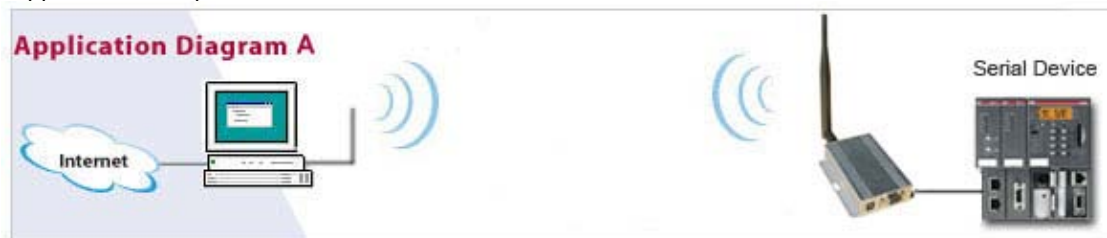

Pin no.	RS232 DB9 Male
1	-
2	TX
3	RX
4	-
5	GND
6	-
7	-
8	-
9	-

**Please download drivers and user guides for this product from:**

**[www.USconverters.com](http://www.USconverters.com)**

To access technical support, please visit the U.S. Converters website at: [www.USconverters.com](http://www.USconverters.com)  
Here you will find:

- Latest drivers and updates for download
- Technical tips
- Documentation
- Configuration support
- and much more...

Feel free to contact our technical support team at [mail@usconverters.com](mailto:mail@usconverters.com) with any issues.  
Copyrights © U.S. Converters

SPECIFICATIONS	
Model number	EZ500
Operating system for configuration software	Windows XP, Vista, 7
Interface	RS232, DB9 Female
RF power	500mW/ 27dBm
Frequency range	912 - 915Mhz
Number of channels	16
Baud rates	1200, 2400, 4800, 9600, 19200, 38400bps
Parity	None, Even, Odd
Stop bits	1
Buffer size	512 bytes
Typ communication range	3000m (9800 feet) at 1200Bps
Data bits	8 (6 and 7 bits not supported)
Processor	Atmel ATMEGA8L
Modulation	GFSK
Receiver sensitivity	-123dBm
Receiving current	less than 45mA
Transmitting current	less than 360mA
Sleep Current	less than 1mA
Size	110 × 63 × 23mm (without screw mount flaps)
Power supply	4.5V -5.5VDC by USB or other external power source. Minimum 200mA recommended.
Working temperature	-20C to 75C
Antenna	50 ohm SMA male, magnetic base, 3 feet cord